
50 GLB-3 50 Ton Fixed Gooseneck Oilfield - ABS Air Brake Axles

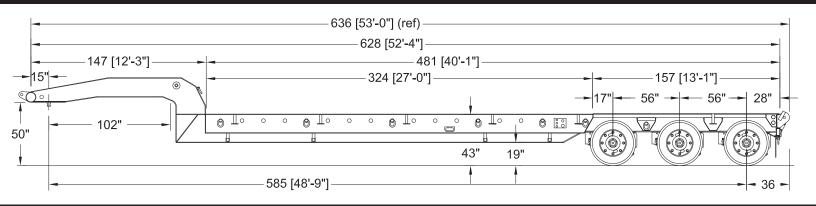

SPECIFICATIONS

Capacity: 100,000 lbs. Trailer Weight: 21,600 lbs.

Deck Width: 8 ft. 6 in. Height: 43in. (Loaded) Overall Length: 53 ft. 0 in. (with 102" swing neck)

Frame Mainrails: fabricated 24" Deep I-Beam. Siderails: fabricated 16" Deep I-Beam

Crossmembers 10" x 12 lbs. per ft. I-Beam, pierced through mainbeam (18" spacing)

Decking 2" Nominal Apitong wood ahead of wheels, 3/8" smooth steel over wheels

Tail Roller Bolt on Tail Roller with Weevil Pockets and two support rollers Fairlead Roller Fairlead Roller in Rear of Gooseneck with Weevil Pockets

Winch Loop Winch Loop on Front of Gooseneck with Full Width Integrated Skid Pipe

Weevil Pockets Mounted every 6 ft on Outside of Side Rail and on one Bolster

Wiring Harness

Gooseneck

4" Relief Style and 102" Swing Clearance STD (Other Lengths Available)

Tie Down

Sealed LED Lights & USA Star PLUS Sealed Modular Wiring Harness

4" Relief Style and 102" Swing Clearance STD (Other Lengths Available)

8- Roto Rings Per Side; Fixed D-Rings on Rear of Neck and Tailboard

Colors Black, Yellow, Blue (standard) Imron Paint

RUNNING GEAR

Tires Twelve 255/70R22.5 (H) Steel Belted Radial (Yokohama)

Hubs/Wheels Disc Type Hubs, 8.25 x 22.5 Disc Type Wheels, Stemco Oil Seals, Hub Piloted

Suspension Air Ride (Combined Capacity 75,000 lbs) with Dump Valve; Lift 1st Axle

Axles Three 5" Diameter 25,000 lbs. each, H.M. series bearings Brakes 16 ½" x 7" Air, "S" Cam, Automatic Slack Adjusters

All Wheel ABS Anti-lock brake system 4S3M, Sensors on (2) Axles, 3 Modulator Valves

Parking Brake Spring Brakes on All Wheels

OPTIONS

Air Lift Deck Rollers - one set 2' Forward of Suspension, one set 6' aft of Gooseneck

Four Inch Dia. stanchion pockets (81" between) – one set 4' aft of Gooseneck, one set on forward Bolster,

includes stanchion pipes and stanchion pipe rack on Gooseneck

Lockable Toolbox in Gooseneck Expanded Metal Floor in Gooseneck Heavy Duty Drop Leg Supports

Dual Air & Electrical Connections - Front of GN and Front of Bed

Manual Raise and Lower Valve

Inverted 5th Wheel

Oak Deck in lieu of Apitong

Aluminum Wheels

Spare Tire Carrier with or without Mounted Spare

Tire & Disc Wheel 275/70R22.5 (H) Upgrade (Yokohama)

Paint (other than standard Black, Yellow, Blue) Price on Request

