


15 HDB-PT Easy Loader Series 15 Ton Tag - (2) 15K Electric Brake Axles

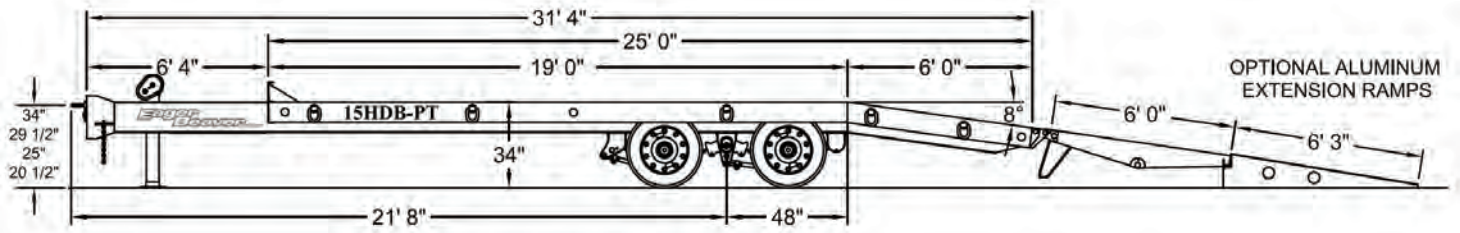

Capacity: 30,000 lbs. Trailer Weight: 8,100 lbs.
Deck Width: 8 ft. 6 in. Length: 19 ft. Height: 34 in.
Hi Tensile V-50 Steel Mainframe
Pierced Crossmembers
Suspension: Hutch H-9700, Three Leaf, Capacity 50,000 lbs.

Heavy Duty Jack
Drawbar Storage Area
Axles: Dexter Heavy Duty
Patented "ROTO RINGS"® Swivel 360°
Cold-Formed Drawbar & Nose Plate

SPECIFICATIONS

Frame	Mainrails: W14" x 22 lbs. wide flange I-Beam, one piece cold formed Hi-tensile 50,000 P.S.I. steel mainrails from front to drawbar to rear of trailer
Crossmembers	6" x 3.7 lbs. per ft. I-Beam pierced through mainbeam
Decking	Nominal 2" Hardwood
Headboard	8" high, full width of trailer Drawbar Storage Area
Lights	Sealed L.E.D., 12 volt, DOT approved
Wiring Harness	USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 1/2" Blue-Krome plated high test, safety hook w/ latch
Parking Jack	70,000 lbs. static / 40,000 lbs. lift (Heavy Duty 2-speed screw type)
Tie Down	Five per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Yellow (Standard), Red, Black

RUNNING GEAR

Tires	Eight 215/75R17.5 (H) Steel Belted Radial
Hubs/Wheels	Four Disc Type Hubs, Eight 6.75 x 17.5, 8-Bolt Hub Piloted Disc Wheels, Oil seals
Suspension	Hutch H-9700, Three leaf, capacity 50,000 lbs. tandem
Axles	Two Heavy Duty Dexter, 15,000 lbs. each
Brakes	12 1/4" x 5" Electric
Break-away	12 Volt, wet cell battery with integrated battery charging system

OPTIONS

Additional Deck Length & Width (20'-21'-22'-23'-24' Optional Lengths) (96" Optional Width)
 Additional "ROTO-RINGS"®
 Tool Box Lid (Lockable) Optional: Expanded Metal Tray Plate
 Spare Tire & Rim 215/75R17.5 (H) Optional: Spare Tire Carrier
 Traction 2" x 2" Angle 6" C/C Wheel Paths Optional: Traction Center Section, Bucket Pocket or Plate
 Ramps Wood (standard) Ladder (Optional N/C)
 Extension Ramps T-6 Alum. 22" x 75" 8° angle (SET)
 Brake controller: Cab mounted w/ complete truck wiring harness and receptacle
 Parking Jack Optional: Jack mounted on Headboard Optional: 2-Speed Landing Gear is Available
 Apitong Decking in lieu of Oak
 Paint (other than standard Yellow) Price on Request